


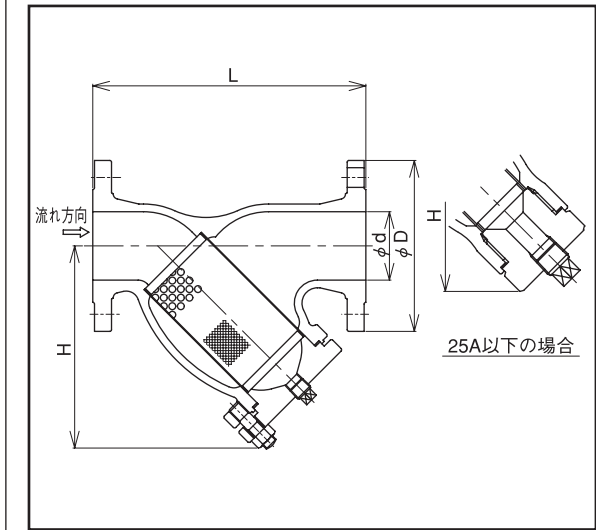

ダクタイル製Y形ストレーナ

Ductile Iron Y-type Strainer

製品種別：ストレーナ

Category：Strainer


DF-510

サイズ Size	15A~100A		
接続規格 Connection	JIS 20K RF		
主要流体名 Main Fluid	LPG	適用法規等 Applicable Regulation	認定品

仕様 Specification			
設計圧力 Design Pressure	2.35MPa	設計温度 Design Temp.	-5~120℃
耐圧試験圧力 Hydrostatic Testing Pressure	3.9MPa	気密試験圧力 Leakage Testing Pressure	2.35MPa

材質 Material			
Body	FCD-S		
Bonnet	S25C		
Screen	SUS304 40メッシュ		

サイズ (Size)	d	D	L	H			重量 Weight	製品コード Code
15A	15	95	130	80			2.5 kg	DF-510-25-015
20A	20	100	140	80			2.9 kg	DF-510-25-020
25A	25	125	160	95			4.8 kg	DF-510-25-025
40A	40	140	210	125			8.3 kg	DF-510-25-040
50A	50	155	250	155			10.5 kg	DF-510-25-050
80A	80	200	320	240			26.5 kg	DF-510-25-080
100A	100	225	380	280			31.5 kg	DF-510-25-100



鋳鋼製フランジ形ストレーナ

Cast Steel Strainer

製品種別：ストレーナ

Category：Strainer

PV-813GT


PV-813GY

PV-813EY


サイズ Size	15A~250A	主要流体名 Main Fluid	NH ₃ etc.
接続規格 Connection	JIS 20K RF, SW, BW, etc.	適用法規等 Applicable Regulation	認定品 設備品

仕様 Specification			
設計圧力 Design Pressure	2.4MPa	設計温度 Design Temp.	
耐圧試験圧力 Hydrostatic Testing Pressure	3.9MPa	気密試験圧力 Leakage Testing Pressure	2.4MPa


材質 Material				
Body	SCPH2	SCS13		
Bonnet	SUS304 or SCPH2	SUS304 or SCS13		
Screen	SUS304	SUS304		
Gasket	PTFE	PTFE		
Design Temp.	-5~120℃	-45~120℃		

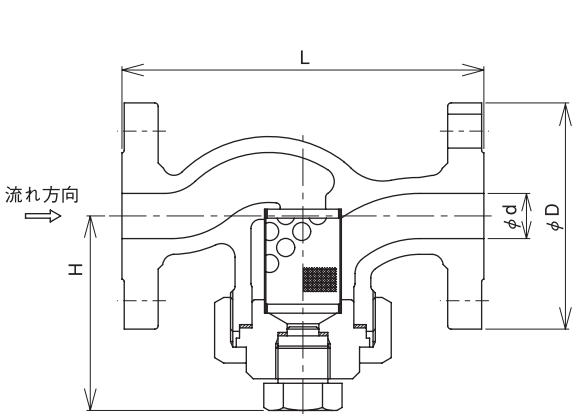


15A~20A

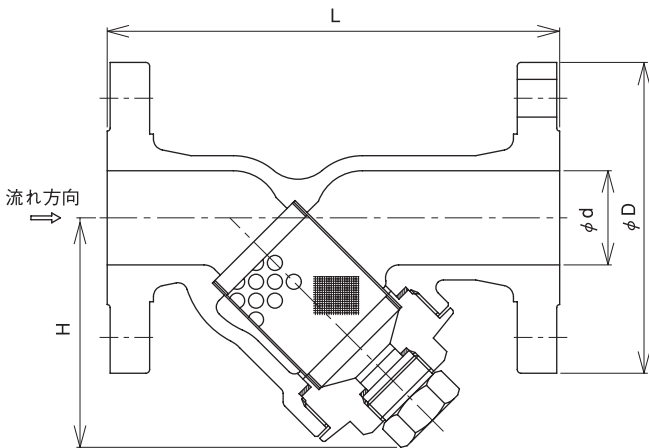


25A~50A

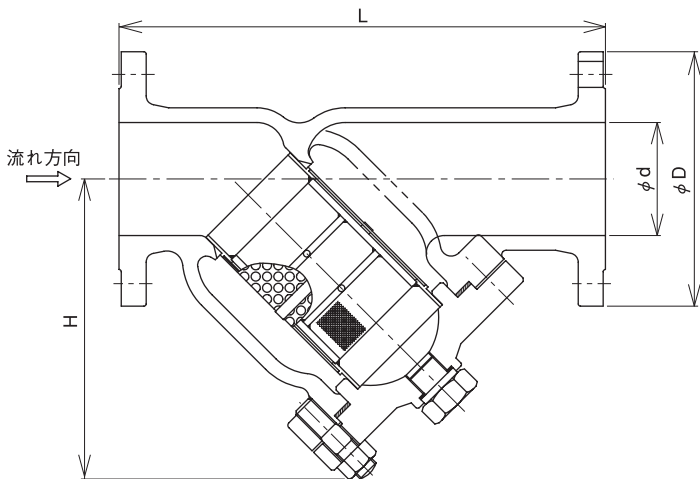

65A~250A



ソケットウェルド



バットウェルド

・製品コード構成・

- Any screen other than 40 meshes (standard) can also be manufactured.
- For manufacturing the product qualified by the Ship Class Rules for Nations, ask us for further information.